


# LGMG

## SR0818D

### DIESEL RT SCISSOR LIFT

- Larger work platform with high capacity offers great productivity.
- Powerful diesel engine, oscillating axels and four-wheel drive provides better performance on most rough terrain job sites.
- The overload system and motion alarm help the operator to complete the job in a much safer way.
- Pull-out engine tray for easy access and maintenance.
- On-board self-diagnosis system makes it easier for quick troubleshooting.

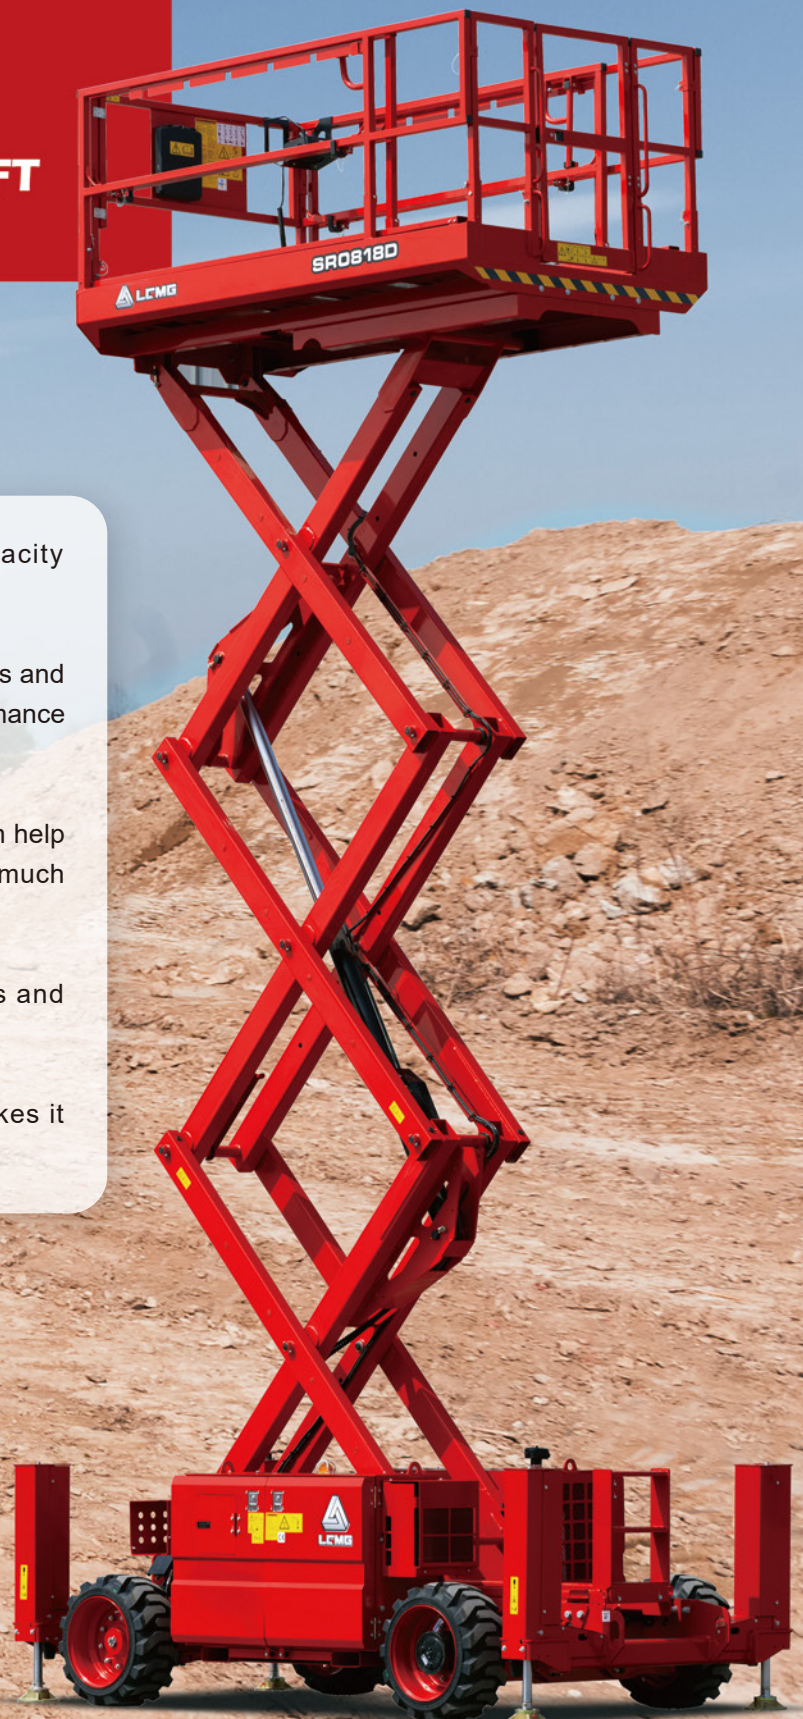



# LGMG DIESEL RT Scissor Lift

## SPECIFICATIONS

MODELS	SR0818D ( SR2669D )	
Measurements	Metric	Imperial
Work Height Max.	9.7m	31'10"
<b>A</b> Platform Height - Raised	7.7m	25'3"
<b>B</b> Platform Height - Stowed	1.41m	4'8"
<b>C</b> Platform Length	2.79m	9'2"
<b>D</b> Platform Width	1.6m	5'3"
<b>E</b> Overall Length (with ladder)	3.76m	12'4"
<b>F</b> Overall Width	1.79m	5'10"
<b>G</b> Overall Height - Rails up	2.58m	8'6"
Overall Height - Rails down	1.89m	6'2"
<b>H</b> Extension Deck	1.52m	5'
<b>I</b> Wheelbase	2.29m	7'6"
Ground Clearance-Center	0.23m	9"

### PRODUCTIVITY

Max. Platform Occupancy (in/out)	4 / 4	
Platform Capacity	680kg	1,499 lbs
Platform Capacity - Extension	140kg	310 lbs
Drive Height	Full Height	
Gradeability - Stowed	40%	
Min. Turning Radius	4.75m	15'7"
Raise/Lower Speed	35 / 30s	
Brakes	Four-wheel brake	
Drive Mode	4x4	
Tire Type	RT Foam-filled	
Tire Size	663x283mm	26"x11"
Ground Pressure, Tyres	490.41 kPa	71.1 psi

### POWER

Power Source	Kubota D1105 18.5kw/24.8hp	
Fuel Tank Capacity	53L	14gal

### HYDRAULIC SYSTEM

Hydraulic Oil Volume	50L	13.21gal
----------------------	-----	----------

### WEIGHT


Machine Weight (CE/ANSI)	4,170kg	9,193 lbs
--------------------------	---------	-----------

### STANDARD FEATURES

Proportional control	Emergency stop device
Foldable guardrail	Manual brake release
Emergency descent	Tilt alarm with lift cut-out
Oscillating axle	Overload sensing system
Self-lock entry gate	Intelligent diagnostic system
All motions alarm	Descent alarm with flashing beacon
RT Foam-filled tires	

### OPTIONAL

Telematics	Solid tires
AC power to platform	Solid non-marking tires
Auto-leveling outriggers	Foam-filled non-marking tires
Cold weather package	Biodegradable hydraulic oil

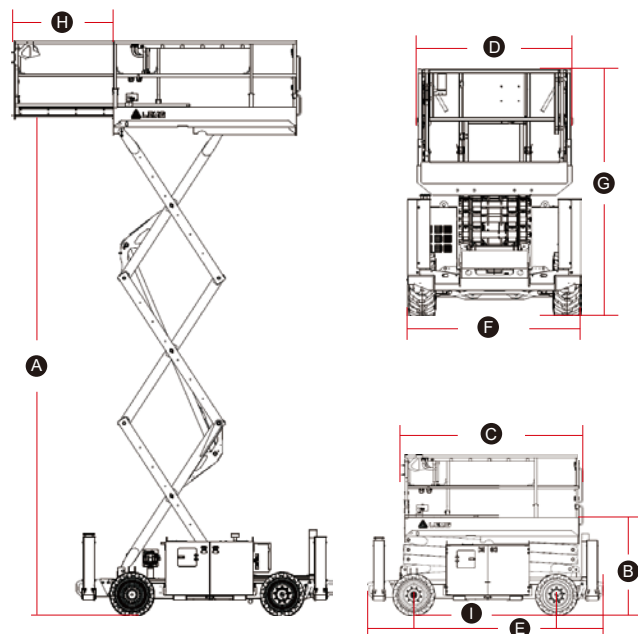

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

## LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China  
Email: sales@lgmg.com.cn Tel: +86 531 6787 9283

## LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands  
Email: sales@lgmgeurope.com Tel: +31 850 642 777

## LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
Email: sales@lgmgna.com Tel: +1 833 288 5464

www.lgmglifts.com

 **LGMG**  
RELIABILITY IN ACTION