

# LGMG

## S0808E II

**ELECTRIC MOTOR DRIVE  
SCISSOR LIFT**

- Large lower control panel
- Entire range designed for indoor and outdoor use
- Universal key components
- More convenient to maintain
- Optional lithium battery for the entire product range



# LGMG ELECTRIC MOTOR DRIVE SCISSOR LIFT

## SPECIFICATIONS

MODELS	S0808E II ( S2632E II )	
Measurements	Metric	Imperial
Work Height Max.	9.8/8m (in/out)	32'2"/26'3" (in/out)
A Platform Height-Raised	7.8/6m (in/out)	25'7"/19'8" (in/out)
B Platform Length	2.26m	7'5"
C Platform Width	0.79m	2'7"
D Overall Length	2.44m	8'
E Overall Width	0.83m	2'9"
F Overall Height-Guardrails Up	2.28m	7'6"
G Overall Height-Guardrails Down	1.9m	6'3"
H Extension Deck	0.9m	2'11"
I Wheelbase	1.85m	6'1"
Ground Clearance(Stowed/Raised)	100/20mm	4"/1"

### PRODUCTIVITY

Max. Platform Occupants	2 (in) / 1(out)	
Platform Capacity	230kg	510 lbs
Platform Capacity-Extension Deck	120kg	265 lbs
Drive Height	Full Height	
Gradeability-Stowed	25%	
Min. Turning Radius	2.2m	7'3"
Raise/Lower Speed	31s / 40s	
Brakes	Front-wheel Brake	
Drive Mode	4x2	
Tire Type	Solid Non-marking	
Tire Size	380x130mm	15"x5"
Ground Pressure, Tyres	1,002 kPa	145.3 psi

### POWER

Power Source	24V (4x6V), 225Ah, FLA	
Power Source (S0808EII-Li)	24V 160Ah	

### HYDRAULIC SYSTEM

Hydraulic Oil Capacity	13L	3.4gal
------------------------	-----	--------

### WEIGHT


Machine Weight(CE/ANSI)	2,200kg	4,850 lbs
-------------------------	---------	-----------

### STANDARD FEATURES

Proportional control	Indoor and outdoor rated
Foldable guardrail	Emergency stop device
Manual brake release	Swing-out component tray
Emergency descent	Tilt alarm with lift cut-out
Pothole guard	Overload sensing system
Self-lock entry gate	Descent alarm with flashing beacon
All motions alarm	Intelligent diagnostic system
Full-height drive	Solid non-marking tires

### OPTIONAL

AC power to platform	Anti-collision protection
Voice alarm system	Maintenance-free battery
Telematics	Biodegradable hydraulic oil

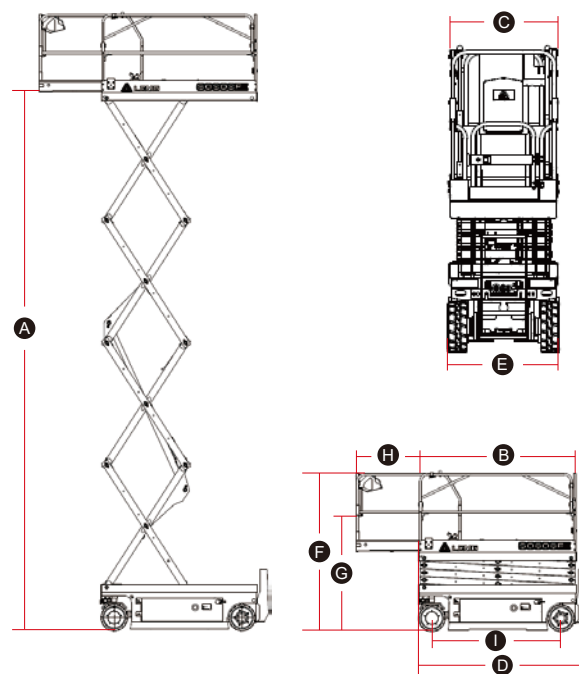

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

## LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China  
Email: sales@lmg.com.cn Tel: +86 531 6787 9283

## LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands  
Email: sales@lmg-europe.com Tel: +31 850 642 777

## LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
Email: sales@lmg-na.com Tel: +1 833 288 5464

www.lmg-lifts.com



RELIABILITY IN ACTION